



PCT/GB2004/302833



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED

09 AUG 2004

WIPO

PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

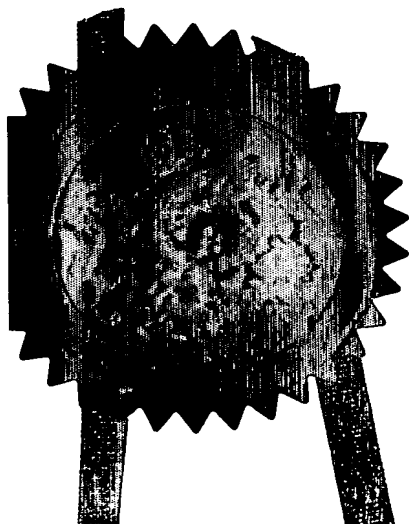

Signed

Andrew Gersey

Dated 2 August 2004

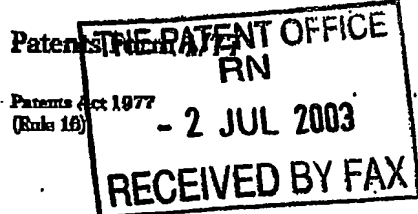

02JUL03 0819564-1 000218
P01/7700 0.00 0315476.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

SMC/IR/P5278

2. Patent application number

(The Patent Office will fill in this part)

0315476.2

- 2 JUL 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Ultraframe (UK) Limited
Enterprise Works
Salthill Road
Clitheroe
Lancashire, BB7 1PE
7336944001
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Improvements in or relating to glazing bar claddings.

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ROYSTONS,

Margaret Marks & clerk

Tower Building,
Water Street,
Liverpool. L3 1BA
Merseyside.

Patents ADP number (if you know it)

1438001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

0073412 02 Jul 03 02:27

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7 ✓

Claim(s) -

Abstract -

Drawing(s) 1 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 1/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

ROYSTONS - Authorised Agents 02-07-2003

12. Name and daytime telephone number of person to contact in the United Kingdom

S.M. Cardwell - 0151-236 5147/1417

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0073412 02 JUL 03 02:27

1

TITLE: Improvements in or relating to glazing bar claddings.

DESCRIPTION

The present invention relates to glazing bar claddings.

A typical glazing bar comprises an extruded aluminium elongate member having an upstanding central web and a cross-bar in the form of say transverse side arms depending from each side thereof to support glazing panels to either side thereof. The glazing bar is provided with upper and lower cappings. The cappings are made of plastics having relatively thin single skin walls.

In one known construction the upper and lower capping have gaskets along edges thereof between which roof panels, usually glazing panels, are to be retained, and means for locating the cappings on the bar. The flexibility of the single skin aids sealing of the cappings with the roof panel, but has disadvantageous thermal properties. In addition the single skin open profiles can be vulnerable to distortion under certain circumstances. For example, during transit and handling and some times under the influence of solar radiation, especially in the case of dark colours.

The present invention aims to provide a solution.

Accordingly, a first aspect of the invention provides a glazing bar and an upper capping therefor and means for locating the capping on the glazing bar, the glazing bar having a stem and lateral flange means for supporting roofing panels

2

directly or indirectly, and wherein the upper capping comprises at least a twin wall construction.

Multiple walls with spacing webs may be used. Conveniently a twin wall construction is employed having inner and outer walls having a plurality of spaced webs extending therebetween to divide the twin wall construction into a plurality of chambers. Alternatively additional walls can be added to form further chambers.

Foam material, pvc or others may, be added to the walls or to fill the chambers for enhanced thermal effects. More usually the capping has a top and two depending sides. The depending sides have a gasket along edges thereof for sealing on roofing panels retained on the glazing bar. The edges thereof extend between the ends of the inner and outer walls of the capping. The gasket conveniently forms part of said edge spanning the gap between the ends of the inner and outer walls. The gasket preferably includes a body connecting with the capping and one or more lips which branch from the body and engage the roofing panel. More particularly the inner wall terminates at a greater distance from the roof panel than the outer wall so that the gasket is at least partially concealed by the outer wall.

More preferably, the glazing panel further comprises a lower capping which is of twin wall construction, although it could have more than two walls. As with the upper capping web elements between the inner and outer walls define a plurality chambers. The twin skin construction, with or without foam, serves to provide

Improved thermal insulation compared with the known single wall cappings. The lower capping includes means for locating it with respect to the glazing bar.

More particularly, end edges of the lower capping carry respective gaskets to engage with the underside of the roofing panels.

When the upper capping is in place a duct is formed underneath it, between it and the roofing panels. More correctly two ducts are formed, one each side of the glazing bar upstand. Those ducts form a useful insulating chamber, however it has been found that the thermal insulating properties can be further enhanced if the duct is sub divided.

Accordingly, another aspect of the invention provides a glazing bar and an upper capping therefor and means for locating the capping on the glazing bar, and wherein the glazing bar has a stem and lateral flange means for supporting roofing panels, and wherein the space within the capping between the stem and the roofing panel is divided into at least two chambers.

More preferably, the space is divided into inner and outer chambers. The division may be by projections formed on the stem and extending towards the inside wall of the capping. More preferably, the division is formed by protrusions that depend from the inside of the capping. Preferably the protrusions extend up to said stem. However, it is not essential that the protrusion makes physical contact with the stem. It can stop short of the stem and still give advantageous thermal barrier effects. Where the division branches from the stem it can stop short of the capping. More preferably the dividing wall or protrusion is arcuate as seen in cross-section.

The various aspects of the invention will now be described further hereinafter, by way of example only, with reference to the accompany drawings; in which:-

Figure 1 is a cross-section through a roof construction embodying the glazing bar and capping according to one embodiment of the invention,

Figure 2 is an enlarged view of the gasket of the upper capping accordingly to one embodiment of the invention, and

Figure 3 is a cross-section through a roof construction embodying a glazing bar and capping according to another embodiment of the invention.

Referring firstly to figures 1 and 2, a roof construction for use in constructing conservatory roofs comprises an aluminium glazing bar 30 having a central upstand 32 and lateral side supports 34,36 for roofing panels 38,40. It further comprises an upper capping 42 comprising a twin wall construction having inner and outer walls 44,46 and a plurality of spaced webs 48 extending therebetween to define air chambers 47. One or more intermediate walls may be provided to further enhance the thermal insulation properties. The capping is made of plastics. The inner wall has a pair of flared legs 52,54 with hooked ends to engage with a recess 56 in the central upstand to secure the capping with respect thereto in a manner that is well known in the art. Any other convenient means of securing the capping to the glazing bar may be used.

The capping in the embodiment of figure 1 is generally semi-circular, as viewed in cross section, but it may take any other desired shape. However, it is to be noted that the capping provides depending sides 58 that terminate in edges that

are provided with gaskets 60. More particularly in the preferred embodiment, as shown in greater detail in figure 2, the inner and outer walls 44,46 terminate with spaced apart end regions 62,64 and the gap therebetween is bridged by a body part 66 of the gasket 60. The gasket further comprises at least one lip seal, two in the illustrated embodiment that are directed in opposite directions for the body connection, and that engage with the roofing panel. The gasket is made from a suitable sealing material that exhibits the desired resilience to provide a good seal with the roofing panel. Both the body part 66 and the lip elements 68,70 will flex as necessary to provide the seal. The flexing of the body part compensates for the reduced flex exhibited by the multi skin capping construction.

It will be noted that the inner and outer end regions are spaced by different amounts from the roofing panel. More particularly, the inner end region 62 is disposed a greater distance from the roofing panel than the outer end region 64. Thus the line between the ends is inclined relative to the roofing panel rather than parallel thereto. As mentioned above, this is advantageous, because it enables the gasket to be at least partially concealed by the outer walls.

The gasket may be a separate component from the capping, but preferably it is formed integrally with it. Conveniently it is bonded in place. It may be formed as a co-extrusion, or as a post extrusion.

The construction of figure 1 further comprises a lower capping 80 which is co-operable with the glazing bar 30. The lower capping is generally U-shaped with a base 88 and two upstanding side walls 90, although any other desired shape may be utilised. As with the upper capping, the lower capping has at least inner




and outer walls 82,84. A plurality of webs 86 extend therebetween to define a plurality of air chambers and to space apart the inner and outer walls. Intermediate walls may be provided as with the outer cappings. The respective ends of the side walls are provided with gaskets 92,94 that provide sealing engagement with the underside of the roofing panels 38,40. The gasket has a lip 90 that is interposed between a support limb 37 of the glazing bar and the roofing panel. A further lip 98 extends in an outward direction. The gasket 92 is preferably formed integrally with the lower capping. It may be bonded thereto as part of the extrusion process of the lower capping or as a post extrusion process.

Referring now to figure 3, this shows an alternative embodiment of capping and glazing bar, but which shares many of the features of the embodiment of figure 2 and which are identified by corresponding reference numerals and to which the foregoing description applies. The lower capping is identical to that of figure 1. The upper capping has a different cross sectional shape. However, it is also to be noted that the space within the upper capping is divided by a protrusion 100, which in the illustrated embodiment depends from the inner wall 44 of the capping and extends up to the stem 32 of the glazing bar. Thus upper and lower air chambers 102,104 are formed to opposite sides of the stem – which gives rise to advantageous thermal effects as mentioned above.

It will be understood that the division of the space within the capping according to this aspect of the invention could be applied to cappings having a single wall construction rather than those having the multi wall construction of the present invention.

Figure 3 also illustrates how the cavities formed by the multi wall construction of the upper and/or lower cappings may be either filled with an insulation material, such as foamed PVC, as shown at 106, or have the insulation material applied to either wall of a cavity, as shown at 108a,108b to provide an insulating lining. The insulation is only shown in some of the cavities, but it will be understood that in practice, where provided, it will usually be provided to the capping as a whole, eg: to all the cavities, or to line all of one skin.

The presence of the insulating foam may avoid the need for the dividing webs 48,86. In other words the capping can be formed as a sandwich comprising skins of plastics sandwiching the foamed insulation layer therebetween.

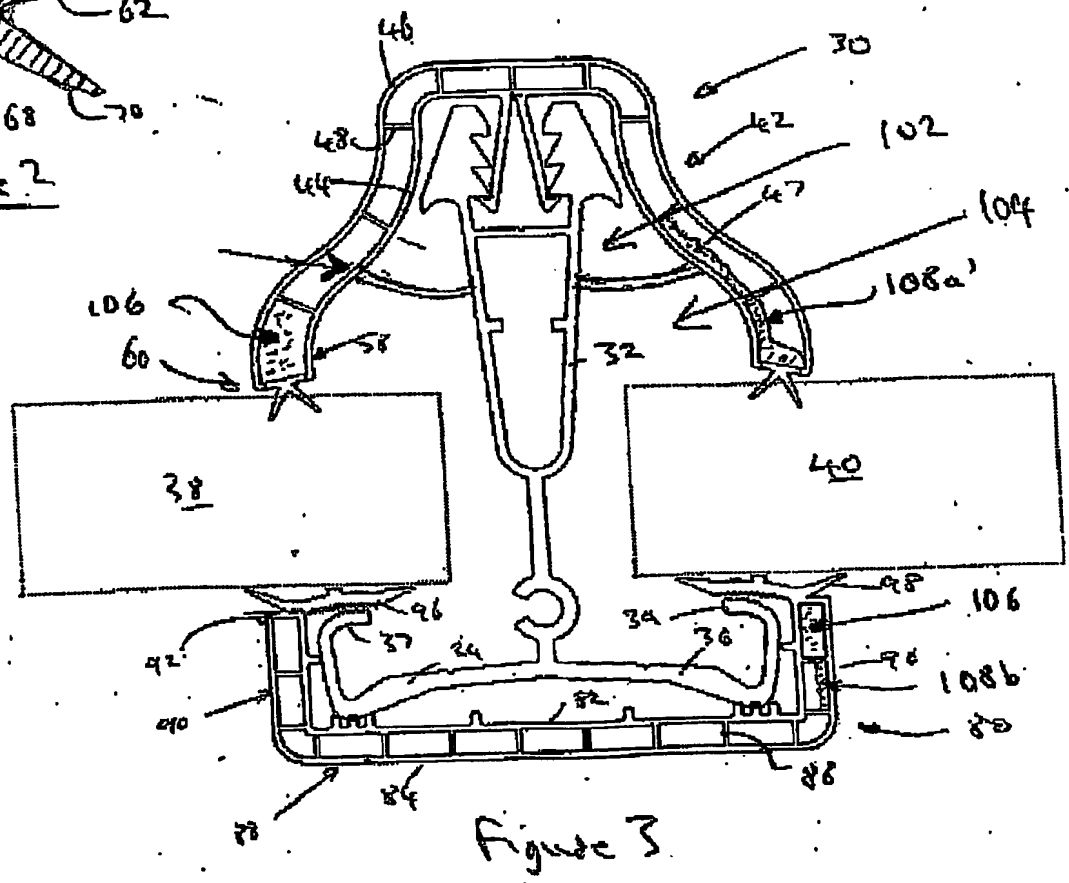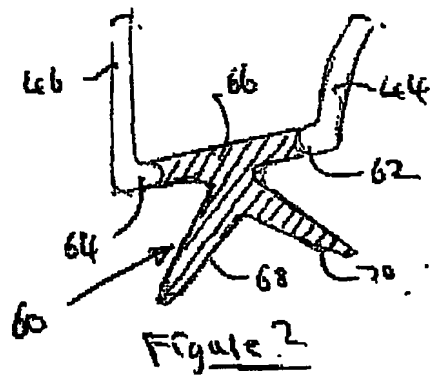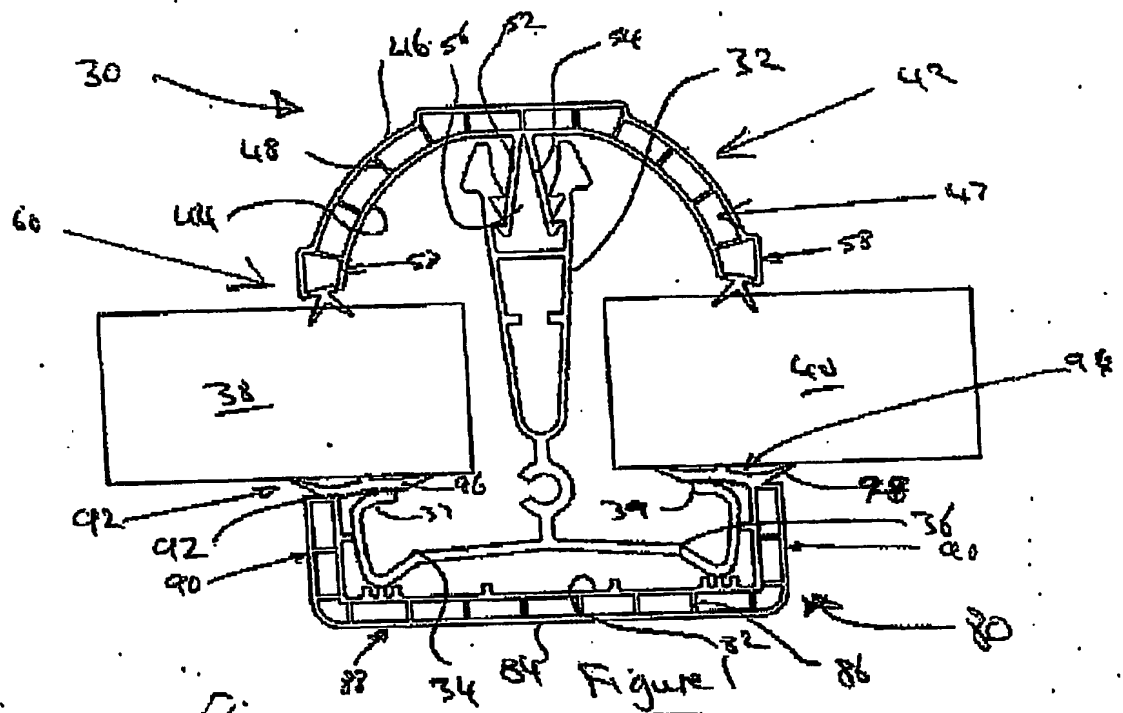

PCT/GB2004/002833

